




A personal car of distinction . . .

FORD THUNDERBIRD



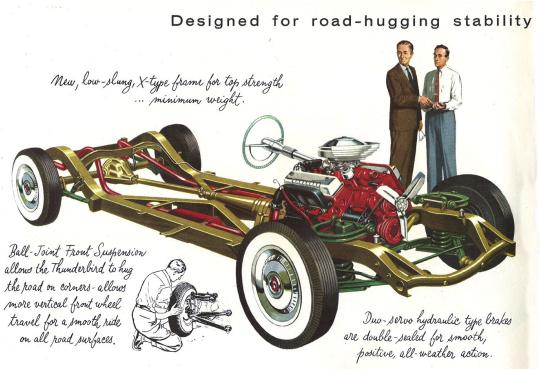



THE THUNDERBIRD CHASSIS

The Thunderbird chassis is designed for rugged roadability plus comfort and practicality. The frame is X-type with an extra-low center of gravity. Ball-Joint Front Suspension allows the Thunderbird to hold the road like a coat of paint. The Hotekhiss Drive and specially-mounted 5-leaf rear springs absorb "take-off" shock. Brakes are double-sealed for safer, more uniform all-weather action.

THE THUNDERBIRD POWER

The brilliant new Thunderbird Special is an advanced form of Ford's famous Y-block V-8 engine. Whatever your demands, the Thunderbird gives you new Trigger-Torque action for nimble, responsive Go-power at all speeds—and all the high-performance characteristics you could wish for. With this it combines fast warm-up, smooth, quiet operation and simple servicing. The Thunderbird is custom-engineered for superb Trigger-Torque performance with either conventional 3-speed transmission . . Overdrive . . . or

NEW SPEED-TRIGGER FORDOMATIC DRIVE

New lightning-fast step-down action means no waiting when you take off in the Thunderbird with new Fordomatic Drive. You go through three forward speeds far more smoothly than you could shift through them yourself.







THUNDERBIRD SPECIFICATIONS:

Y-block V-8 Engine: Overhead-vaive, 90°-V-type. 4-barrel carburetor; automatic choke; dual exhaust system; 3-ring, superfitted aluminum alloy pictons; free-burning intake and exhaust vaives. Pressure-type cooling system; fell pressure labrication. Six-volt electrical system; weatherproof ignition; special 31mm piggs; 40 amp, generator; 17-plate, 40 amphr. battery.

Semi-Centrifugal Type Clutch (except Fordomatic): Dry, single-plate type; 11 in, dia.; 113.1 sq. in, facing area; suspended pedal.

Conventional Drive: 3-speed type; all helical gears; floor-mounted lever, Ratios; low, 2.32 to 1: 2nd, 1.48 to 1: reverse, 2.82 to 1.

Conventional Drive: 3-speed type; all helical gears; floor-mounted lever. Ratios: low, 2.32 to 1; 2nd, 1.48 to 1; reverse, 2.82 to 1.

Overdrive: 3-speed transmission with planetary gear train providing automatic 4th gear. Manual lock-out. 4th gear ratio, 0.70 to 1.

Overdrive: 3-speed transmission with planetary gear train providing automatic 4th gear; Manual lock-out, 4th gear ratio, 0,78 to 1. Fordomatic: Single stage, 3-element torque converter, air cooled; automatic intermediate gear; automatic "low-speed" starts with wide-open throttle; illuminated, floor-mounted, Safety-Sequence selector lever.

Hotchkiss Drive: Tubular propeller shaft; needle-bearings in universal joints, pressure-type lubrication fittings.

Ball-Joint Front Suspension: Tailored-to-weight coil springs; ride stabilizer; double-acting shock absorbers.

Reor Suspension: Composite-type axie housing; 5-leaf springs with inserts at tips of all leaves; double-acting shock absorbers; wind-up bumpers; tension-type rear shackler, Ratios; 3.73 to 1 with Conventional Drive; 3.92 to 1 with Overdrive and 3.30 to 1 with Fordomatic, Frame: New low-slung, X-type frame; box-section side rails.

Brakes: 11" dia., double-sealed, duo-servo type: 175 sq. in, lining area: suspended pedal

Steering System: Symmetrical linkage type; 17" dia. wheel, 3" in-out adjustment; over-all ratio, 20 to 1; turning diameter, approx 36 ft. (center of outside front tire).

Wheels and Tires: 6.70 x 15, 4-ply, tubeless tires on 5' rims.

wheels and a lines: 0.0% x13, 4-pp, tubeless tires on 5° hims.

Exterior Dimensions: 102" wheelbase; 56" front and rear treads; 175.3" length; 70.2" width. Height with design load: 52.2" top of glass-fibre top to ground; 34.2" top of door to ground.

Interior Dimensions: 45.4" leg room; 58.8" hip room; 53.3" shoulder room; 33.2" head room (glass-libre top). Trunk dimensions (max.): 58.2" width; 34.8" length; 16.1" height.

Color and Upholstery: Raven Black, Torch Red or Thunderbird Blue exterior body colors, with harmonizing Black and pleated

White, need and preserve white or immerators believe any extension of the footbase state. As the cold control Panel with Illuminated control knobs for main light switch, air ducts, windshield wipers; parcel compartment with locking-type push-button latch; 4-way, illuminated starter-ignition switch; courtesy light in panel at center, operated by integral switch and automated core witches. Rear view mirror on windshield upper modifier, push horn; half-circle-lobe nor ring.

conjusting with but my conjusting the many con

neering, "ower-Lift vindows, i-RES1 linted safety glass, profounate, Overdrive, white sidewall lires, tachometer, electric clock, ciga tell fighter, glass. There top, convertible fabric top, special fuel and vacuum pump unit, heater, radio, rear fender shields, full where overs, simulated wire wheels, engine dress-up kit.

PRICES Some of the internal lithurated or seferated to in this entition are at attack. For the mine of the "Newdokhida"

PRICES: Some of the items illustrated or referred to in this catalog are at extra cost. For the price of the Thunderbird with the equipment you desire, see your Ford Dealer.

The specifications contained herein were in effect of the time this folder was approved for printing. The Ford Divisio of the Ford Meter Company receives the right to discontinue models at any time, or change specifications or design without notice and without incurring obligation.

Though the Thunderbird is distinctively different, it is so engineered and built that it can be serviced by Ford Dealers – everywhere.

FORD Division of FORD MOTOR COMPANY

